


# Zelite™

Linear Low Density Polyethylene Tubing

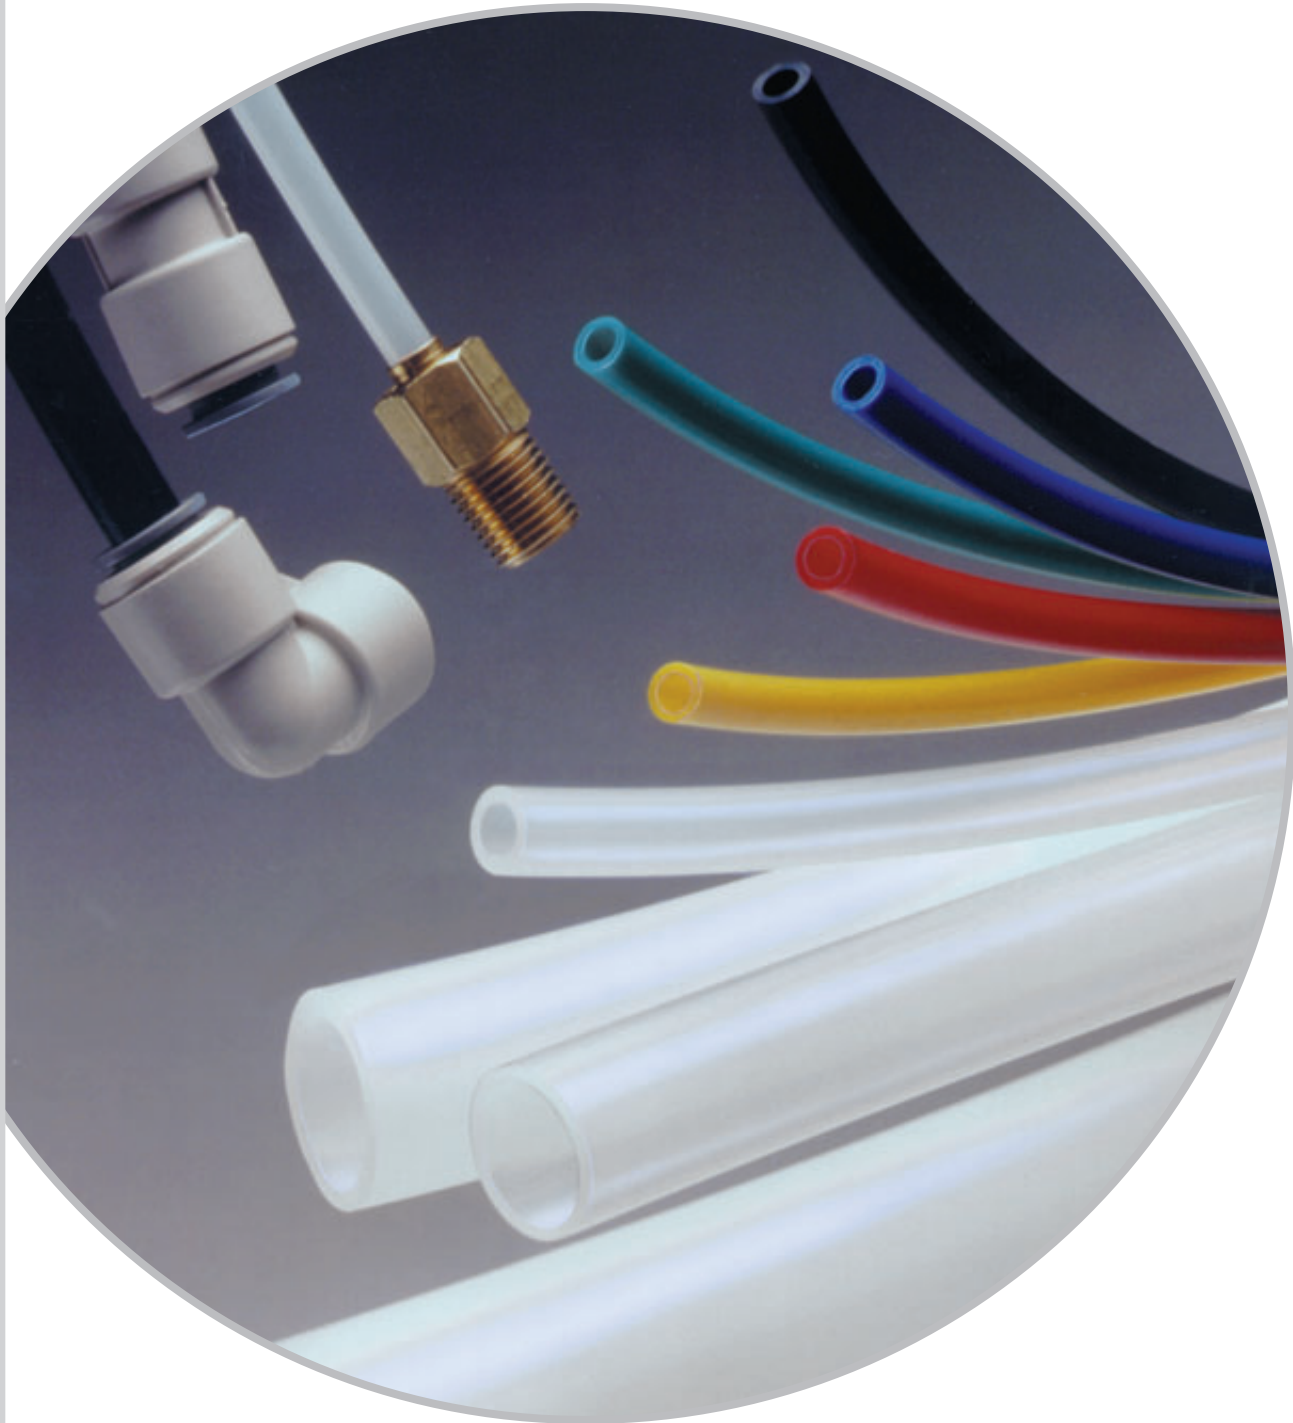


**ESOP** Employee Owned  
for Your Benefit

Fluid Transfer Specialists®

## Linear Low Density Polyethylene Tubing

- Made from non-toxic ingredients conforming to FDA standards
- Does not impart a taste or odor to critical streams
- Flexible, lightweight, durable
- Translucent natural or opaque colors
- Made from 100% virgin grade raw materials
- Good dielectric properties
- Offers enhanced resistance to stress cracking
- Chemically inert; forms a good barrier to gases, vapors, and moisture

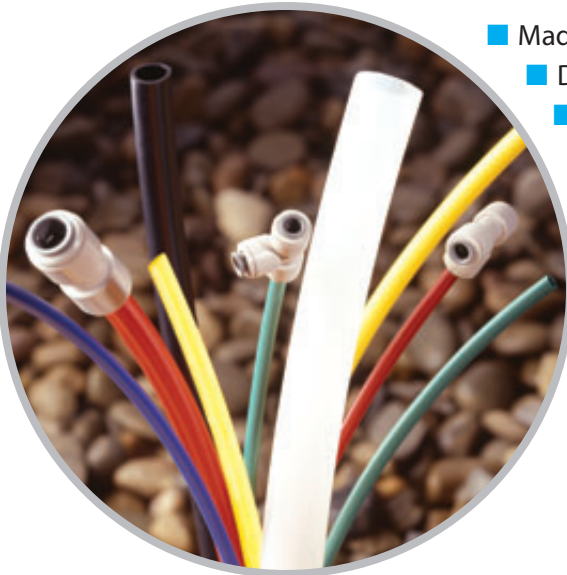

PART NO. <i>NATURAL</i>	PART NO. <i>BLACK</i>	ID (IN.)	OD (IN.)	WALL (IN.)	STD. LENGTH (FT.)	WORKING PSI AT 70°F	BURST PSI AT 70°F	LBS. PER 100 FT.
251 0571	251 0529	.170	1/4	.040	500	135	540	1.05
251 0571		.170	1/4	.040	100	135	540	1.05
251 0256	251 0214	1/8	1/4	1/16	500	180	720	1.47
251 0256		1/8	1/4	1/16	100	180	720	1.47
251 0886		3/16	5/16	1/16	500	140	560	2.0
251 0886		3/16	5/16	1/16	100	140	560	2.0
251 1201	251 1159	1/4	3/8	1/16	500	120	480	2.5
251 1201		1/4	3/8	1/16	100	120	480	2.5
251 2146	251 2104	3/8	1/2	1/16	500	90	360	3.5
251 2146		3/8	1/2	1/16	100	90	360	3.5
251 2293	251 2279	1/2	5/8	1/16	100	70	280	4.4
251 2398		5/8	3/4	1/16	100	60	240	5.4
251 2713		3/4	1	1/8	100	90	360	13.7
251 2818		7/8	1	1/16	100	45	180	7.4
251 2923		1	1-1/4	1/8	100	72	288	17.6
251 3028		1-1/4	1-1/2	1/8	50	59	236	21.5
251 3133		1-1/2	1-3/4	1/8	50	50	200	25.5

Add length suffix to part number when ordering. Example: 500 ft. of .170" I.D. x 1/4" O.D. black color tubing is part number 251 0529-500.

**BOLD** indicates the critical dimension for fittings application.

PART NO. <i>RED</i>	PART NO. <i>YELLOW</i>	ID (IN.)	OD (IN.)	WALL (IN.)	WORKING PSI AT 70°F	BURST PSI AT 70°F	LBS. PER 100 FT.
251 0606	251 0627	.170	1/4	.040	135	540	1.05
251 1236	251 1257	1/4	3/8	1/16	120	480	2.5

PART NO. <i>GREEN</i>	PART NO. <i>BLUE</i>	ID (IN.)	OD (IN.)	WALL (IN.)	WORKING PSI AT 70°F	BURST PSI AT 70°F	LBS. PER 100 FT.
251 0557	251 0543	.170	1/4	.040	135	540	1.05
251 1187	251 1173	1/4	3/8	1/16	120	480	2.5

Red, yellow, green, and blue color tubing is sold by standard coil length only (500 ft.). Add length suffix to part number when ordering. Example: 500 ft. of .170" I.D. x 1/4" O.D. red color tubing is part number 251 0606-500.

**BOLD** indicates the critical dimension for fittings application.

### Notes

ZELITE conforms to the applicable regulations of the FDA for use of articles intended for contact with food. The increased tensile strength of ZELITE Linear Low Density, over that of a low density polyethylene, enhances its resistance to splitting during use.

FEP-lined polyethylene, offering superior purity at a very reasonable cost, is available through minimum order. Medium-high and ultra-high density polyethylene material is available through minimum order. Call for details on these custom products.

### Physical Properties\*\*

Hardness, Shore D ±5	50
Tensile Strength, psi	2250
Elongation at Break, %	600
Brittle Temperature, °F	-76
Vicat Softening Point, °F	196
Maximum Operating Temperature, °F	140

\*\*Values listed are typical for the material used in manufacture, except where noted, and are meant only as a guide to aid in design. Field testing should be performed to find the actual values for your application.

### Recommended Fittings

- Newloc® push-to-connect fittings

### Custom Services

- Cut
- Size
- Color
- Heat-Form
- And More

Call for more information: 800-506-3924 or 215-526-2300

Zelite, Newloc, NewAge, "Fluid Transfer Specialists," and The "N" Logo are trademarks of NewAge® Industries, Inc.

WARRANTY: NewAge Industries' products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries' products, item for item, which after examination by NewAge Industries are deemed defective. NewAge Industries specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.

NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term New-Age.

© NewAge Industries, Inc. 2010 Specifications are subject to change without notice.

7/20/10

DISTRIBUTOR PARTNER



145 James Way  
Southampton, PA 18966  
www.newageindustries.com

800-50-NEWAGE  
(800-506-3924)  
215-526-2300  
Fax: 800-837-1856  
215-526-2190  
info@newageindustries.com